


Datasheet**Codice Dianflex: 241-0168****NEOPERL®****PERLATOR® HONEYCOMB® Aerator**
TT Size

flow, stop and go®

**Materials used**Body: POM
O-Ring: EPDM
(only PCA® models)Washer: EPDM
(until end of 2024: NBR)

Housing: brass

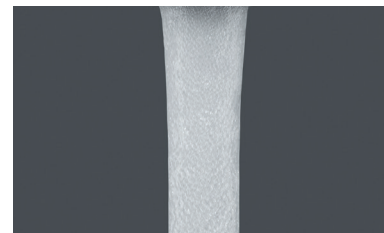

Aerated stream

Model Overview

Restricted flow rates	Color Code	TT insert	Wetted surface area (in mm², insert only)
PCA® 2.2 gpm max.	yellow	44.3053.000	3320

PCA® = **P**ressure **C**ompensating **A**erator: constant flow rate irrespective of line pressure**Assembly Instructions****ATTENTION!**

Product may not be altered!
Shall not be used for hot water application exceeding 70°C


ATTENTION!

Max. mounting torque 1.5 Nm
steadily applied

Suitable Housings

Please refer to the datasheet „Classical Aerator Housings TT Size“ on our website.

Dimensions (in mm)

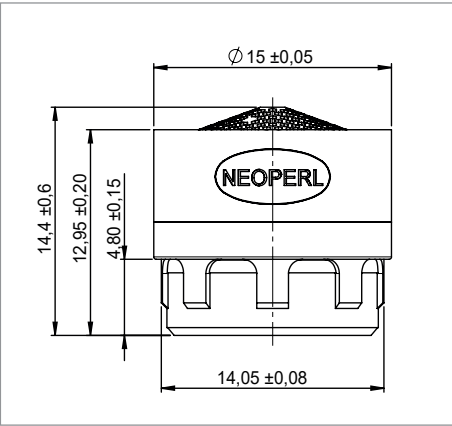

PERLATOR® HC PCA® TT insert

Application Areas

Drinking water only


Basin faucet

Kitchen faucet


Not suitable for pressureless water heaters

Operating Conditions

Continuous

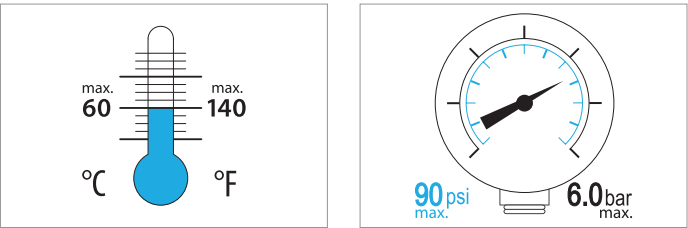

Short-term (3 minutes max.)

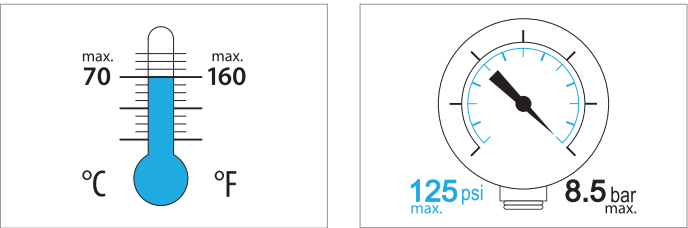

Indicated pressure values refer to supply line pressure.
Avoid water hammer.

Trademarks are registered in various countries