

Datasheet**Codice Dianflex: 241-0170****NEOPERL®**

flow, stop and go®


PERLATOR® Coin Slot Aerators
STD Size Male M24x1Flow classes Z-C:
long sleeve**Materials used**

Body: POM
 O-Ring: EPDM
 (only PCA® models)
 Washer: EPDM



Aerated stream

Threaded metal-free aerator with integrated coin slot for easy installation/removal: no need for special key. Suitable to replace any classical aerator with male M24x1 housing.

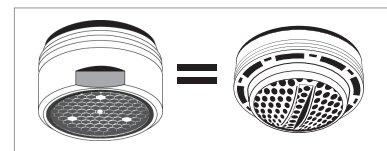

100% compatible with M24x1

Model Overview**PERLATOR® Coin Slot Aerators**



Flow class	Color code	Part. No.	Wetted surface area (in mm²)
A (13.5-15.0 l/min at 3 bar)	light blue	45.2003.000	4806

Assembly Instructions

Only use suitable coin.
Do not use other tools.




Use NEOPERL key 09.9170.0 or refer to above dimensions for self-made assembly tools.

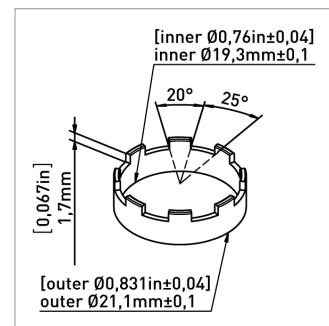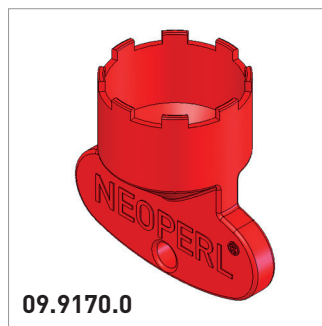


PERLATOR® Coin Slot Aerators STD Size Male M24x1

flow, stop and go®


Dimensions (in mm) according to EN246

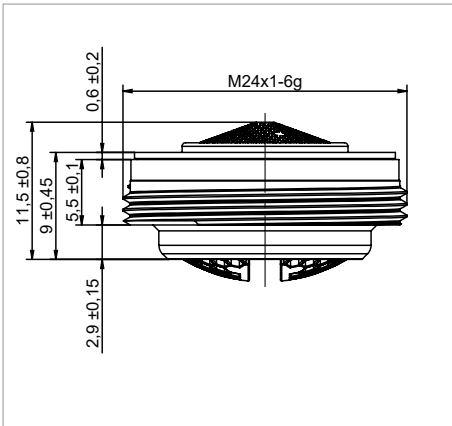

PL-CS-PCA®-STD with short sleeve

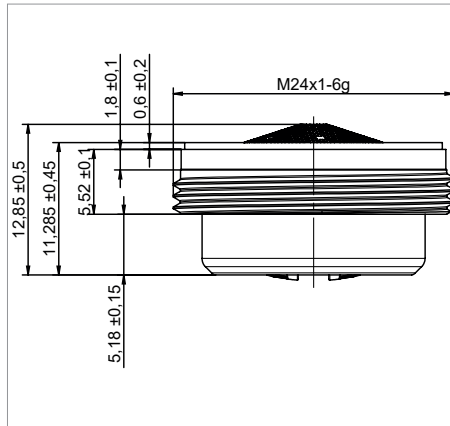

PL-CS-PCA®-STD with long sleeve

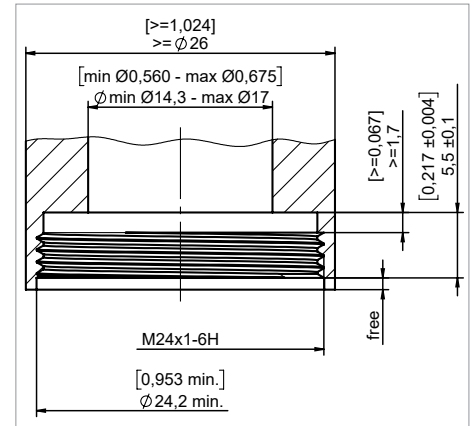


Recommended Mounting Dimensions

For pressure resistance reasons, thread must be true to gage! Screw aerator in until flush with spout end.

PERLATOR Coin Slot M24x1 faucet aerators are fully compatible with the mounting and pressure requirements of the European Standard EN 246.


Application Areas




Drinking water only



Basin faucet





Kitchen faucet



Not suitable for pressureless water heaters

Operating Conditions

Continuous

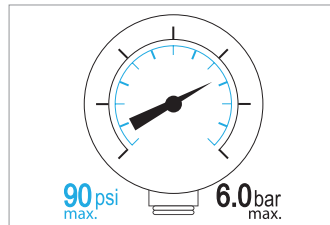
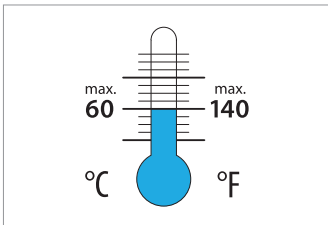


ATTENTION!

Product may not be altered!

Shall be used for hot water application exceeding 70°C

Short-term (3 minutes max.)

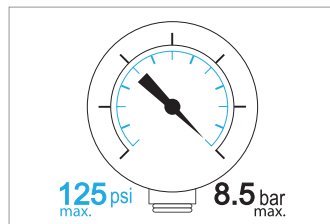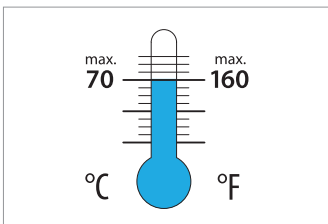

Indicated pressure values refer to supply line pressure.
Avoid water hammer.