

# Codice Dianflex: 245-328

CARATTERISTICHE TECNICHE - TECHNICAL CHARACTERISTICS  
CARACTERÍSTICAS TÉCNICAS - CARACTÉRISTIQUES TECHNIQUES



**ARTICOLO / Item**  
**Artículo / Article**


**08011A**

Rubinetto temporizzato per lavabo serie CLASSIC con comando a leva antivandalico.


CLASSIC series self-closing lever basin tap, vandal proof type.

Grifo temporizado lavabo colección CLASSIC con palanca antivandálica.

Robinet temporisé lavabo série CLASSIC avec manette antivandalisme.

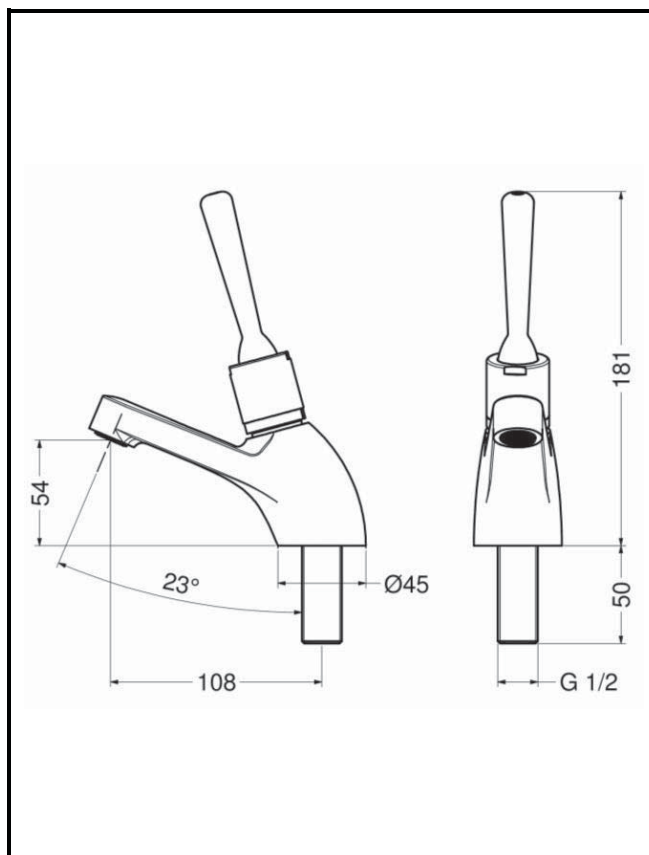

## PREMISCELATORE MECCANICO / Mechanical mixer / Mezclador mecánico / Pré-mitigeur mécanique

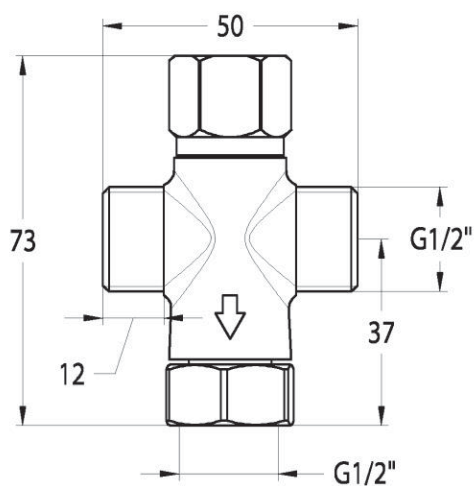

IT



#### COMPOSIZIONE

- Corpo in ottone cromato
- Leva in ottone cromato multidirezionale antisvitamento

#### CARATTERISTICHE FUNZIONALI

|                                      |                                                             |
|--------------------------------------|-------------------------------------------------------------|
| <b>Portata:</b>                      | 6 l/min (c/limitatore di portata)                           |
| <b>Pressione di alimentazione:</b>   | Min 1 – max 6 bar                                           |
| <b>Pressione raccomandata:</b>       | 2 – 4 bar                                                   |
| <b>Temperatura di alimentazione:</b> | 5 – 65 °C                                                   |
| <b>Tempo di erogazione:</b>          | 15 sec. @ 3 bar<br>(tolleranza come da EN 816: 15 ± 5 sec.) |

EN



#### COMPOSITION

- Chromed brass body
- Multidirectional anti-unscrewing chromed brass lever

#### OPERATING CHARACTERISTICS

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| <b>Flow rate:</b>               | 6 l/min (w/flow regulator)                                      |
| <b>Operating pressure:</b>      | Min 1 – max 6 bar                                               |
| <b>Recommended pressure:</b>    | 2 – 4 bar                                                       |
| <b>Water inlet temperature:</b> | 5 – 65 °C                                                       |
| <b>Flow time:</b>               | 15 sec. @ 3 bar<br>(tolerance as stated in EN 816: 15 ± 5 sec.) |

ES



#### COMPOSICIÓN

- Cuerpo en latón cromado
- Palanca en latón cromado multidireccional anti-desenroscamiento

#### CARACTERÍSTICAS FUNCIONALES

|                                     |                                                                      |
|-------------------------------------|----------------------------------------------------------------------|
| <b>Caudal:</b>                      | 6 l/min (c/limitador de caudal)                                      |
| <b>Presión de alimentación:</b>     | Min 1 – max 6 bar                                                    |
| <b>Presión recomendada:</b>         | 2 – 4 bar                                                            |
| <b>Temperatura de alimentación:</b> | 5 – 65 °C                                                            |
| <b>Tiempo de descarga:</b>          | 15 sec. @ 3 bar<br>(tolerancia como indicada en EN 816: 15 ± 5 sec.) |

FR



#### COMPOSITION

- Corps en laiton chromé
- Levier en laiton chromé multidirectionnel anti-dévisage

#### CARACTÉRISTIQUES FONCTIONNELLES

|                                    |                                                                       |
|------------------------------------|-----------------------------------------------------------------------|
| <b>Débit:</b>                      | 6 l/min (avec limiteur de débit)                                      |
| <b>Pression d'alimentation:</b>    | Min 1 – max 6 bar                                                     |
| <b>Pression recommandée:</b>       | 2 – 4 bar                                                             |
| <b>Température d'alimentation:</b> | 5 – 65 °C                                                             |
| <b>Temporisation:</b>              | 15 sec. @ 3 bar<br>(tolérance comme indiqué dans EN 816: 15 ± 5 sec.) |