DIF

BQE3



Codice Dianflex: 411-BDQE3Q

STOCK

	D	D	BQE3Q
mm	Ø	mm	
600x24	598	595x595	
600x48	598	595x595	

CARATTERISTICHE:
Diffusori a flusso elicoidale con getti regolabili.

COSTRUZIONE:
Acciaio verniciato bianco RAL 9010, deflettori in polipropilene nero RAL 9005.

IMPIEGO:
A soffitto, in mandata e ripresa (senza deflettori). Altezza di installazione: 2,5-4,1 m.

FISSAGGIO:
Fissaggio con viti laterali o a mezzo vite centrale su ponte di montaggio.

ACCESSORI:
Plenum in acciaio zincato standard o isolato, con o senza rete equalizzatrice, serranda di taratura e ponte di montaggio.

CHARACTERISTICS:
Swirl diffusers with adjustable throws.

CONSTRUCTION:
RAL 9010 white painted steel, deflection blades are made of polypropylene RAL 9005 black.


UTILIZATION:
For ceiling installation and for air intake (without deflectors) and delivery.
Installation height: 2,5-4,1 m.

FIXING:
Fixing by using lateral screws or central screw on muonting bridge.

ACCESSORIES:
Galvanized steel plenum, standard or insulated, with or without equalizer sheet, calibration damper and mounting bridge.

DISEGNI - DRAWINGS

BQE3Q

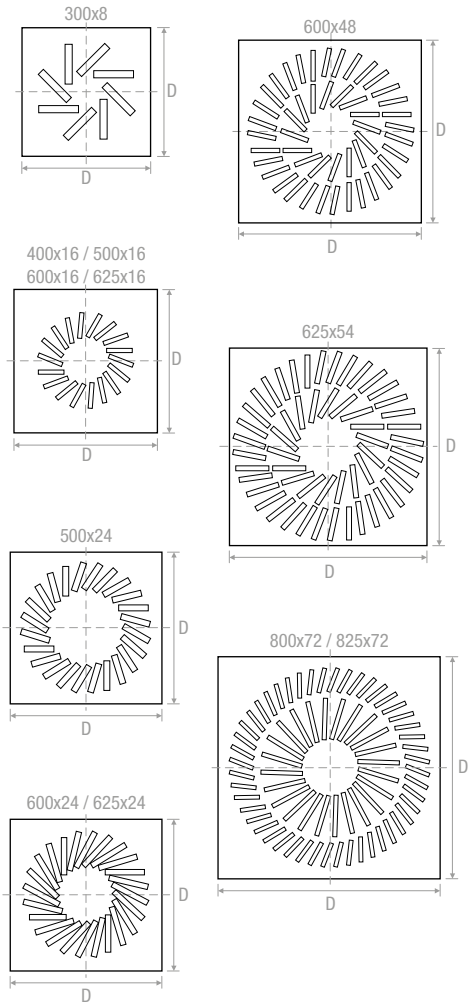


PREZZI - PRICES PLENUM BQE3Q


AxB	Cannotto Spigot	PQZ1	PQZI1	PQZ2	PQZI2	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio Fixing bridge
mm	Ø mm							
600	**248**							

DISEGNI - DRAWINGS


PQZ1




PQZ2




Particolare montaggio
Assembly detail




PQZI1



PQZI2






Plenum isolato esternamente spessore 6 mm
Plenum externally insulated thickness 6 mm

PREZZI - PRICES PLENUM BQE3R

	Plenum zincato - Galvanized plenum			PDCQ	PDCQI	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio Fixing bridge
	AxA	Ø D	Ø E					
mm	mm	mm	mm	€	€	€	€	€
298	400	123	290					
398	500	148	390					
498	600	198	490					
598	700	248	590					
623	700	298	615					
798	900	348	790					
823	900	348	815					

DISEGNI - DRAWINGS

PLENUM PDCQ

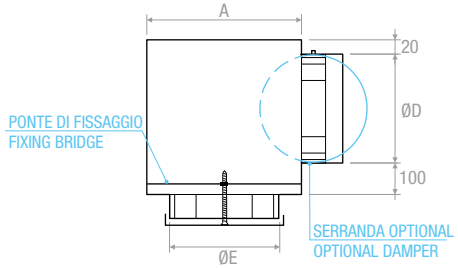

PLENUM PDCQI

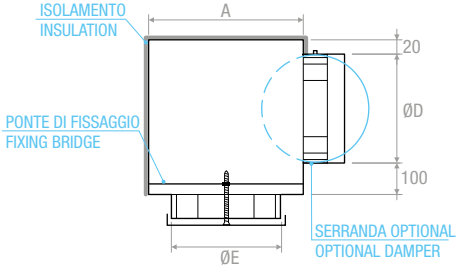


DIAGRAMMA SCELTA RAPIDA - QUICK SELECTION DIAGRAM

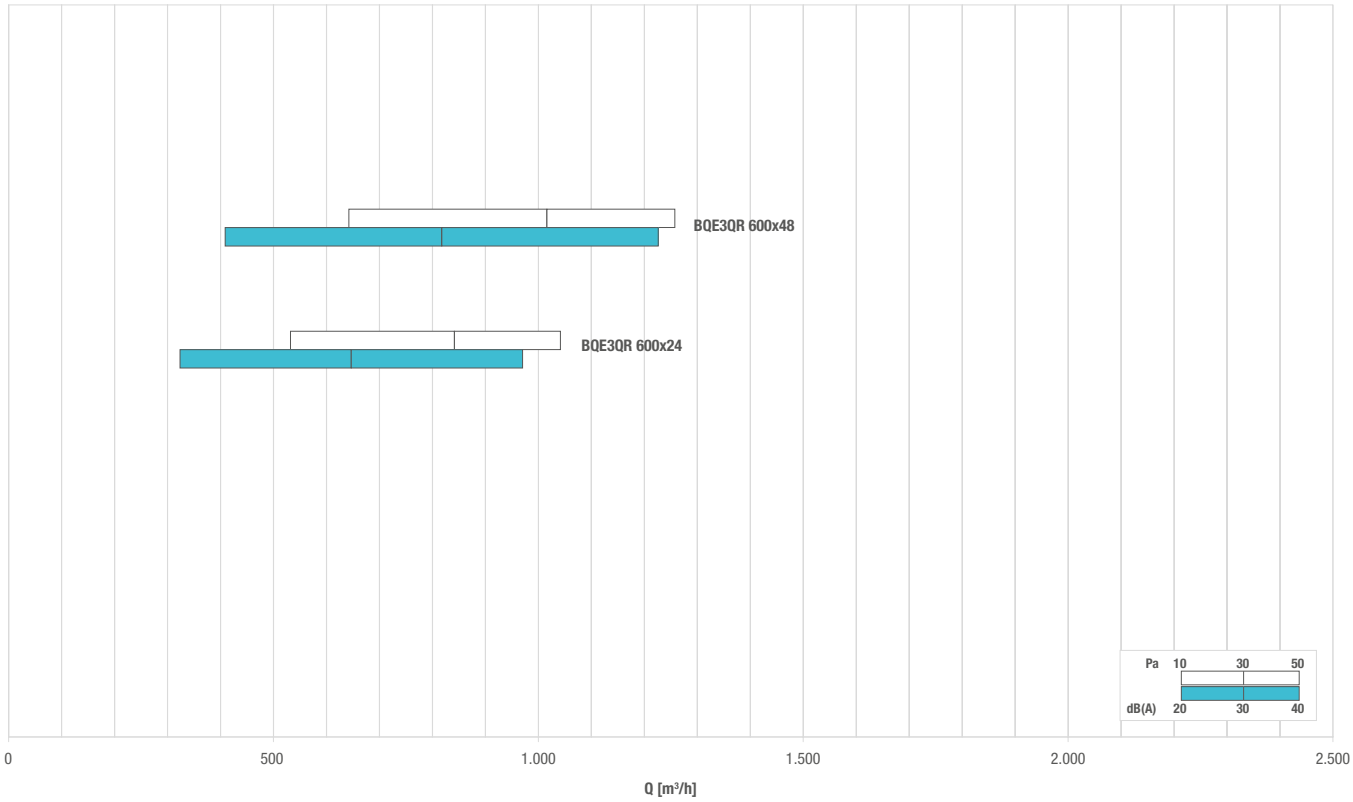


TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A_k [m^2]	Q [m^3/h]		L_{WA} [dB(A)]		$X_{(0,20)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
BQE3QR 600x24	0,0449	530	1040	26	42	2,9	5,6	10	50
BQE3QR 600x48	0,0568	640	1260	26	41	3,1	6,1	10	50